



# AUTO/LT TIRES





DURO IS DERIVED FROM THE ENGLISH WORD "DURABILITY", WHICH REFLECTS HWA FONG RUBBER GROUP'S HIGHEST CORPORATE PRINCIPLE: QUALITY FIRST. THE FOUR LETTERS – D, U, R AND O – REPRESENT THE FOUR PILLARS UPHOLDING THIS PRINCIPLE OF HIGHEST QUALITY: DEPENDABLE, UTILITY, RAPID AND OUTSTANDING.

**DEPENDABLE**

WITH MORE THAN 70 YEARS' DEVOTION TO TIRE MANUFACTURING, HWA FONG RUBBER GROUP IS YOUR RELIABLE PARTNER PROVIDING DURO TIRES WITH BEST QUALITY.

**UTILITY**

DURO'S COMPREHENSIVE PRODUCT LINE MEETS AND SATISFIES EVERY CUSTOMER'S NEEDS, FROM PASSENGER CAR, LIGHT TRUCK, SUV, MOTORCYCLE, ATV, BICYCLE, TRAILER, SPECIALTY TO RACE KART.

**RAPID**

DEDICATED TO EXCEEDING OUR CUSTOMER'S EXPECTATIONS IN FULL SATISFACTION, FROM SWIFT COMMUNICATION TO SMOOTH DELIVERY WITH MAXIMUM EFFICIENCY, NOT TO MENTION THE SUPERB HIGH SPEED STABILITY AND PERFORMANCE OF DURO TIRES.

**OUTSTANDING**

GREAT QUALITY, ADVANCED TECHNOLOGY AND EXCELLENT SERVICE ARE OUR COMMITMENT TO FULFILL A WIDE RANGE OF INTERESTS AND APPLICATIONS. NUMEROUS CERTIFICATIONS AND AWARDS ARE THE PROOF, E.G. WINNERS OF THE RED DOT AWARD AND THE TAIWAN EXCELLENCE AWARD OF 2018



# ABOUT DURO

DURO Tire has been around since 1945, and in that time, we've learned a few things about making tires and tubes. First, we build over 70 years of technological know-how into everything we make ensuring that each product is designed and manufactured with safety, long life, and maximum effectiveness for your particular application.

DURO produces a complete range of specialty tires. From passenger car, motorcycle, bicycle, industrial and ATV tires, DURO has your entire tire needs covered. Our manufacturing capability spans the globe, and our sales network is worldwide. Our capabilities are world-class.



TAIWAN


DURO has manufacturing facilities throughout asia, as well as sales offices in the US and asia, supporting our dealer network worldwide. For all your comprehensive tire and tube needs, look no further than DURO tires. For more information on the entire DURO product line, visit our website at [www.duro.com.tw](http://www.duro.com.tw) or [www.durotire.com](http://www.durotire.com)



USA



THAILAND

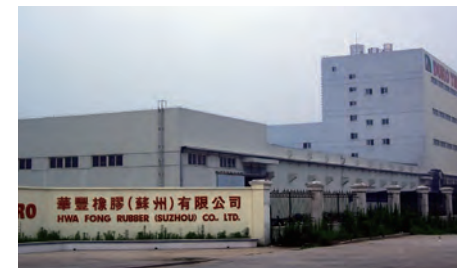

CHINA



# INDEX \_



PAGE. 04 **Passenger**

---

DP-3000	DP-3200	DP-5100	DP-5200
DP-3050	DP-3210	DP-5110	
DP-3100	DP-5000	DP-5120	

PAGE. 12 **UHP**

---

DP-8000  
DP-8100

PAGE. 16 **SUV / Pick-Up / Light Truck**

---

DL-6000	DL-6120	DL-6220	DI-2042
DL-6100	DL-6200	DL-6500	
DL-6110	DL-6210	DL-6600	

PAGE. 22 **Commercial**

---

DC-7000	DC-7100	DC-7300
DC-7200	DC-7020	DC-7310
DC-7010	DC-7210	

PAGE. 28 **Winter**

---

DW-9000	DW-9300	DW-9700
DW-9100	DW-9400	
DW-9200	DW-9500	

PAGE. 32 **Special Trailer**

---


DS-2100

PAGE. 33 **Truck / Bus**

---

DT-1000  
DT-1050

# Passenger

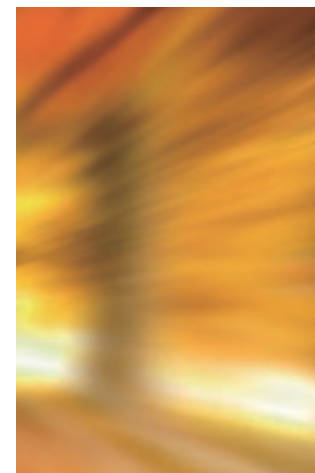




## DP-3000

- Tread design delivers high speed performance and reduces rolling resistance.
- Special compound provides longer wear and greater fuel economy.
- Three types of staggered tread pitches reduce road noise.
- Four central straight grooves enhance handling and stability, while enlarged shoulder tread width reduces slide slip.
- Fitted on POLARIS GEM Electric



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG			TREAD	TRAC	TEMP	70	D	E
								TREAD	TRAC	TEMP						
13	80	135/80R13	70T	3.50	546/21.5	133/5.2	7.2	560	A	A	70	D	E			
		145/80R13	75T	4.00	562/22.1	145/5.7	7.3	560	A	A	70	D	E			
		155/80R13	79T	4.50	578/22.8	157/6.2	7.4	560	A	A	70	D	E			
	70	145/70R13	71T	4.50	534/21.0	150/5.9	7.3	560	A	A	70	D	E			
		155/70R13	75T	4.50	548/21.6	157/6.2	7.4	560	A	A	70	D	E			
		165/70R13	79T	5.00	562/22.1	170/6.7	7.5	560	A	A	70	D	E			
		175/70R13	82H	5.00	576/22.7	177/7.0	7.6	400	A	A	70	D	E			
		175/70R13	82T	5.00	576/22.7	177/7.0	7.6	400	A	A	70	D	E			
		185/70R13	86T	5.50	590/23.2	189/7.4	7.7	560	A	A	70	D	E			
		185/70R13	86H	5.50	590/23.2	189/7.4	7.7	500	A	A	70	D	E			
65	155/65R13	73T	4.50	532/20.9	157/6.2	7.4	560	A	A	70	D	E				
	155/65R13	73H	4.50	532/20.9	157/6.2	7.4	500	A	A	70	D	E				
	165/65R13	77T	5.00	544/21.4	170/6.7	7.5	560	A	A	70	D	E				
60	205/60R13	86H	6.00	576/22.7	209/8.2	7.9	500	A	A	71	D	E				
14	75	185/75R14	89T	5.00	634/25.0	184/7.2	7.7	560	A	A	70	D	E			
		195/75R14	92T	5.50	648/25.5	196/7.7	7.8	560	A	A	71	D	E			
		205/75R14	95T	5.50	664/26.1	203/8.0	7.9	560	A	A	71	D	E			

Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG						
								TREAD	TRAC	TEMP				
14	70	165/70R14	81T	5.00	588/23.1	170/6.7	7.5	560	A	A	70	D	E	
		175/70R14	84T	5.00	602/23.7	177/7.0	7.6	560	A	A	70	D	E	
		175/70R14	84H	5.00	602/23.7	177/7.0	7.6	500	A	A	70	D	E	
		185/70R14	88T	5.50	616/24.3	189/7.4	7.8	560	A	A	70	D	E	
		185/70R14	88H	5.50	616/24.3	189/7.4	7.8	500	A	A	70	D	E	
		195/70R14	91T	6.00	630/24.8	201/7.9	8.0	560	A	A	71	D	E	
		195/70R14	91H	6.00	630/24.8	201/7.9	8.0	500	A	A	71	D	E	
		205/70R14 XL	98T	6.00	644/25.4	209/8.2	8.1	560	A	A	71	D	E	
	205/70R14 XL	98H	6.00	644/25.4	209/8.2	8.1	500	A	A	71	D	E		
	65	155/65R14	75T	4.50	558/22.0	157/6.2	7.4	560	A	A	70	D	E	
		165/65R14	79T	5.00	570/22.4	170/6.7	7.5	560	A	A	70	D	E	
		165/65R14	79H	5.00	570/22.4	170/6.7	7.5	500	A	A	70	D	E	
		175/65R14	82T	5.00	584/23.0	177/7.0	7.8	560	A	A	70	D	E	
		175/65R14	82H	5.00	584/23.0	177/7.0	7.8	500	A	A	70	D	E	
		175/65R14 XL	86T	5.00	584/22.9	177/6.9	7.6	560	A	A	70	D	E	
		185/65R14	86T	5.50	596/23.5	189/7.4	8.0	560	A	A	70	D	E	
		185/65R14	86H	5.50	596/23.5	189/7.4	8.0	500	A	A	70	D	E	
	60	195/65R14	89H	6.00	610/24.0	201/7.9	8.0	500	A	A	71	D	E	
		165/60R14	75T	5.00	554/21.8	170/6.7	7.5	560	A	A	70	D	E	
		165/60R14	75H	5.00	554/21.8	170/6.7	7.5	500	A	A	70	D	E	
		185/60R14	82H	5.50	578/22.8	189/7.4	7.9	500	A	A	70	D	E	
	55	195/60R14	86H	6.00	590/23.2	201/7.9	7.9	500	A	A	71	D	E	
		185/55R14	80H	6.00	560/22.0	194/7.6	7.7	500	A	A	70	D	E	
		185/55R14	80V	6.00	560/22.0	194/7.6	7.7	400	A	A	70	D	E	
	15	75	205/75R15	97T	5.50	689/27.1	203/8.0	7.9	560	A	A	71	D	E
			215/75R15	100T	6.00	703/27.7	216/8.5	8.1	560	A	A	71	D	E
			225/75R15	102T	6.00	719/28.3	223/8.8	8.1	560	A	A	71	D	E
			235/75R15	105T	6.50	733/28.9	235/9.3	8.3	560	A	A	71	D	E
70		205/70R15	96T	6.00	669/26.3	209/8.2	8.1	560	A	A	71	D	E	
		205/70R15	96H	6.00	669/26.3	209/8.2	8.1	500	A	A	71	D	E	
		215/70R15	98T	6.50	683/26.9	221/8.7	8.0	560	A	A	71	D	E	
65		225/70R15	100T	6.50	697/27.4	228/9.0	8.1	400	A	A	71	D	E	
		175/65R15	84H	5.00	609/24.0	177/7.0	7.8	500	A	A	70	D	E	
		185/65R15	88T	5.50	621/24.4	189/7.4	8.0	560	A	A	70	D	E	
		185/65R15	88H	5.50	621/24.4	189/7.4	8.0	500	A	A	70	D	E	
		195/65R15	91H	6.00	635/25.0	201/7.9	8.0	500	A	A	71	D	E	
		195/65R15	91V	6.00	635/25.0	201/7.9	8.0	400	A	A	71	D	E	
		195/65R15 XL	95T	6.00	635/25	201/7.9	8.0	560	A	A	71	D	E	
		205/65R15	94H	6.00	647/25.5	209/8.2	8.0	500	A	A	71	D	E	
		205/65R15	94V	6.00	647/25.4	209/8.2	8.0	400	A	A	71	D	E	
		215/65R15	96H	6.50	661/26.0	221/8.7	8.1	500	A	A	71	D	E	
60		155/60R15	74H	4.50	567/22.3	157/6.2	7.4	500	A	A	70	D	E	
	185/60R15	84H	5.50	603/23.7	189/7.4	7.9	500	A	A	70	D	E		
	185/60R15 XL	88H	5.50	603/23.7	189/7.4	7.9	500	A	A	70	D	E		
	195/60R15	88H	6.00	615/24.2	201/7.9	7.9	500	A	A	71	D	E		

Passenger

UHP

SUV / Pick-Up  
Light Truck

Commercial

Winter

Special Trailer

Truck /  
Bus

Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG			71	D	E	
								TREAD	TRAC	TEMP				
15	60	195/60R15	88V	6.00	615/24.2	201/7.9	7.9	400	A	A	71	D	E	
		205/60R15	91H	6.00	627/24.7	209/8.2	7.9	500	A	A	71	D	E	
		205/60R15	91V	6.00	627/24.7	209/8.2	7.9	400	A	A	71	D	E	
		215/60R15	94H	6.50	639/25.2	221/8.7	8.0	500	A	A	71	D	E	
	55	175/55R15	77H	5.50	573/22.6	182/7.2	7.4	500	A	A	70	D	E	
		185/55R15	82H	6.00	585/23	194/7.6	7.7	400	A	A	70	D	E	
		185/55R15	82V	6.00	585/23.0	194/7.6	7.7	400	A	A	70	D	E	
		195/55R15	85V	6.00	595/23.4	201/7.9	7.9	400	A	A	71	D	E	
	50	195/50R15	82V	6.00	577/22.7	201/7.9	7.9	400	A	A	71	D	E	
		205/50R15	86V	6.50	587/23.1	214/8.4	8.2	400	A	A	71	D	E	
16	65	205/65R16	95H	6.00	672/26.4	209/8.2	8.0	540	A	A	71	D	E	
		195/60R16	89H	6.00	640/25.2	201/7.9	7.9	540	A	A	71	D	E	
	60	205/60R16	92H	6.00	652/25.7	209/8.2	7.9	500	A	A	71	D	E	
		205/60R16	92V	6.00	652/25.7	209/8.2	7.9	400	A	A	71	D	E	
		215/60R16	95H	6.50	664/26.1	221/8.7	8.0	500	A	A	71	D	E	
		215/60R16	95V	6.50	664/26.1	221/8.7	8.0	400	A	A	71	D	E	
	55	225/60R16	98H	6.50	676/26.6	228/9.0	8.3	500	A	A	71	D	E	
		205/55R16	91H	6.50	632/24.9	214/8.4	8.2	500	A	A	71	D	E	
		205/55R16	91V	6.50	632/24.9	214/8.4	8.2	400	A	A	71	D	E	
		215/55R16	93V	7.00	642/25.3	226/8.9	8.2	400	A	A	71	D	E	
		215/55R16 XL	97V	7.00	642/25.2	226/8.8	8.2	400	A	A	71	D	E	
		50	195/50R16 XL	88V	6.00	602/23.7	201/7.9	7.9	400	A	A	71	D	E

## DP-3050

- Four straight tread grooves in staggered arrangement enhance water evacuation.
- Cross-support grooves with multilateral fine sipes offer great grip.
- Uneven block design for a quiet drive
- Jointless Band (JLB) technology for greater stability
- Special shoulder tread grooves exert side grip and handling.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	71	D	E
15	70	205/70R15	96H	6.00	669/26.3	209/8.2	8.1	71	D	E
		215/70R15	98H	6.50	683/26.9	221/8.7	8.1	71	D	E
16	70	215/70R16	100H	6.50	708/27.9	221/8.7	8.1	71	D	E
		235/70R16	106T	7.00	736/29.0	240/9.4	8.4			
16	65	215/65R16	98H	6.50	686/27.0	221/8.7	8.1	71	D	E
17	65	225/65R17	102H	6.50	724/28.5	228/9.0	8.3	71	D	E



# DP-3100 PERFORMA T/P

- Advanced touring design provides superior traction and long life.
- Center rib enhances high speed performance and stability.
- Four wide tread grooves for greater all-road control
- Aggressive sipping on shoulder blocks increase cornering grip.
- Variable pattern design minimizes road noise.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG		
								TREAD	TRAC	TEMP
14	65	185/65R14	86H	5.50	596/23.5	189/7.4	8.1	600	A	A
	60	185/60R14	82H	5.50	578/22.8	189/7.4	8.1	600	A	A
15	65	195/65R15	91H	6.00	635/25.0	201/7.9	7.8	600	A	A
		195/65R15	91T	6.00	635/25.0	201/7.9	7.8	600	A	A
		205/65R15	94H	6.00	647/25.4	209/8.2	7.9	600	A	A
		205/65R15	94T	6.00	647/25.5	209/8.2	7.9	600	A	A
	60	195/60R15	88H	6.00	615/24.2	201/7.9	7.8	600	A	A
16	65	215/65R16	98T	6.50	686/27.0	221/8.7	8.0	600	A	A
	60	215/60R16	95H	6.50	664/26.1	221/8.7	8.0	600	A	A
		225/60R16	98H	6.50	676/26.6	228/9.0	8.1	600	A	A
		205/55R16 XL	94H	6.50	632/24.8	214/8.4	7.7	600	A	A
	55	205/55R16 XL	94V	6.50	632/24.9	214/8.4	7.7	500	A	A
		215/55R16	93H	7.00	642/25.3	226/8.9	7.8	600	A	A
		215/55R16	93V	7.00	642/25.2	226/8.9	7.8	500	A	A
17	65	215/65R17	98T	6.50	712/28.0	221/8.7	8	600	A	A
		225/65R17	102H	6.50	724/28.5	228/9.0	8.1	600	A	A
		225/65R17	102T	6.50	724/28.5	228/9.0	8.1	600	A	A
		235/65R17	104H	7.00	738/29.0	240/9.4	8.2	600	A	A
		235/65R17	104T	7.00	738/29.0	240/9.4	8.2	600	A	A
		245/65R17	107H	7.00	750/29.5	248/9.7	8.3	600	A	A
		245/65R17	107T	7.00	750/29.5	248/9.8	8.3	600	A	A
	60	215/60R17	95T	6.50	690/27.2	221/8.7	8	600	A	A
		225/60R17	99H	6.50	702/27.6	228/9.0	8.1	600	A	A
		215/55R17	94V	7.00	668/26.3	226/8.9	7.8	500	A	A
		225/55R17	97V	7.00	680/26.8	233/9.2	7.9	500	A	A
55	235/55R17	99H	7.50	690/27.2	245/9.6	8.0	600	A	A	
	215/50R17 XL	95V	7.00	648/25.5	226/8.9	7.8	500	A	A	
	225/50R17	94V	7.00	658/25.9	233/9.2	7.9	500	A	A	
	45	225/45R17 XL	94V	7.50	634/25.0	225/8.9	7.9	500	A	A
	40	205/40R17 XL	84V	7.50	596/23.5	212/8.3	7.9	500	A	A

Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG		
								TREAD	TRAC	TEMP
18	60	225/60R18	100H	6.50	727/28.6	228/9.0	8.1	600	A	A
		235/60R18	103H	7.00	739/29.1	240/9.4	8.2	600	A	A
		245/60R18	105H	7.00	751/29.6	248/9.8	8.3	600	A	A
	55	235/55R18	100V	7.50	718/28.3	245/9.6	8.0	500	A	A
		255/55R18 XL	109V	8.00	737/29.0	265/10.4	8.0	500	A	A
	50	225/50R18	95V	7.00	658/25.9	233/9.2	7.9	500	A	A
		235/50R18	97V	7.50	693/27.3	245/9.6	7.9	500	A	A
	45	225/45R18 XL	95V	7.50	659/25.9	225/8.9	7.9	500	A	A
245/45R18		96V	8.00	677/26.7	243/9.6	8.1	500	A	A	
19	60	255/60R19	108H	7.50	789/31.1	260/10.2	8.4	600	A	A
	55	235/55R19 XL	105V	7.50	741/29.2	245/9.6	8.0	500	A	A
		245/55R19	103H	7.50	753/29.6	253/10.0	8.1	600	A	A
	50	235/50R19	99H	7.50	719/28.3	245/9.6	8.0	600	A	A
		255/50R19 XL	107V	8.00	737/29.0	265/10.4	8.2	500	A	A
	45	245/45R19	98V	8.00	703/27.7	243/9.6	8.1	500	A	A
20	55	235/55R20	102H	7.50	766/30.2	245/9.6	8.0	600	A	A
		255/55R20	107H	8.00	788/31.0	265/10.4	8.2	600	A	A
	50	255/50R20	104H	8.00	764/30.1	265/10.4	8.2	600	A	A

## DP-3200

- Optimized groove design evacuate gravel and reduce noise effectively.
- Extended S-shape blocks on central tread for greater fuel efficiency
- Continuous shoulder ribs provide excellent cornering performance.
- Brand-new compound contributes to excellent wearing resistance and longer mileage.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	60	185/60R14	82H	5.50	578/22.8	189/7.4	9.4
		195/60R14	86H	6.00	590/23.2	201/7.9	9.5
15	60	185/60R15	84H	5.50	603/23.7	189/7.4	9.4
		195/60R15	88H	6.00	615/24.2	201/7.9	9.5
16	55	205/55R16	91V	6.50	632/24.9	214/8.4	9.3





## DP-3210 ECO PILOT

- Uniform tread grooves and shoulder blocks strengthen stiffness and abrasion resistance to prevent uneven wear.
- Unequally-pitched layout for a quiet and easy drive
- Sipes on tread effectively evacuate water and enhance handling.
- Abrasion-resist rubber compound for greater wear resistance and long life



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
15	65	195/65R15	91H	6.00	635/25	201/7.9	7.8



## DP-5000

- Two main tread grooves effectively evacuate water for enhanced safety.
- Network pattern design with fine sipes improve grip.
- Uneven blocks for a smooth and quiet drive
- Jointless Band (JLB) structure for greater high speed stability
- Continuous fine shoulder grooves enhance comfort.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	65	185/65R14	86H	5.50	596/23.5	189/7.4	7.9
	60	185/60R14	82H	5.50	578/22.8	189/7.4	7.8
15	65	205/65R15	94H	6.00	647/25.5	209/8.2	8
	60	195/60R15	88H	6.00	615/24.2	201/7.9	7.9

# DP-5100 FRONTIER ECO

- Four main tread grooves effectively evacuate water and mud for enhanced wet performance.
- Network pattern design with fine sipes improve grip.
- Continuous fine shoulder grooves for greater comfort
- Horizontal grooves enhance braking performance.
- Winner of Taiwan Excellence Award 2018



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG		
								TREAD	TRAC	TEMP
15	65	185/65R15	88H	5.50	621/24.5	189/7.4	8.0	440	A	A
		195/65R15	91H	6.00	635/25.0	201/7.9	8.3	440	A	A
		205/65R15 XL	99H	6.00	647/25.5	209/8.2	8.3	440	A	A
	60	185/60R15	84H	5.50	603/23.7	189/7.4	8.2	440	A	A
		195/60R15	88H	6.00	614/24.2	208/8.2	8.3	440	A	A
		195/55R15	85V	6.00	595/23.4	201/7.9	8.1	440	A	A
50	195/50R15	82V	6.00	577/22.7	201/7.9	8.1	440	A	A	
16	60	205/60R16	92H	6.00	652/25.7	209/8.2	7.9	440	A	A
		215/60R16 XL	99H	6.50	664/24.1	221/8.7	8.4	440	A	A
		205/55R16 XL	94V	6.50	632/24.9	214/8.4	8.2	440	A	A
17	55	215/55R17 XL	98V	7.00	668/26.3	226/8.9	8.3	440	A	A

# DP-5110



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
13	65	155/65R13	73H	4.50	532/20.9	163/6.4	5.5





## DP-5120



PCR



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
15	65	195/65R15	91H	6.00	635/25	201/7.9	7.8

## DP-5200

- Four main tread grooves effectively evacuate water and mud for enhanced wet performance.
- Enlarged shoulder blocks increase cornering stability.
- Network pattern design with fine sipes improve grip.
- Continuous fine shoulder grooves for greater comfort
- Horizontal grooves add in braking performance.



PCR



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	65	175/65R14	82H	5.00	584/23.0	177/7.0	8.1
		185/65R14	86H	5.50	596/23.5	189/7.4	8.2
	60	185/60R14	82H	5.50	578/22.8	189/7.4	8.2
		195/60R14	86H	6.00	590/23.2	201/7.9	8.3
15	70	205/70R15	96H	6.00	669/26.3	209/8.2	8.3
		215/70R15	98H	6.50	683/26.9	221/8.7	8.4
	65	185/65R15	88H	5.50	621/24.5	189/7.4	8.2
		195/65R15	91H	6.00	635/25.0	201/7.9	8.3
		205/65R15	94H	6.00	647/25.5	209/8.2	8.3
	60	185/60R15	84H	5.50	603/23.7	189/7.4	8.2
		195/60R15	88H	6.00	615/24.2	201/7.9	8.3
		205/60R15	91H	6.00	627/24.7	209/8.2	8.3
16	55	195/55R15	85V	6.00	595/23.4	201/7.9	8.1
		215/60R16	95H	6.50	664/26.1	221/8.7	8.4
	55	195/55R16	87V	6.00	620/24.4	201/7.9	8.1
		205/55R16	91V	6.50	632/24.9	214/8.4	8.2






# UHP Ultra High Performance

## DP-8000 PERFORMA HP1

- Directional radial tire with high performance
- Wider contact patch provides stability and control under high speed.
- Four main tread grooves effectively exert water evacuation.
- Cross-support grooves with small-paired sipes prevent uneven wear and reduce noise.
- Reinforced 'Rim Guard' offers high rigidity and protection for aluminum wheels.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG			TREAD	TRAC	TEMP
								TREAD	TRAC	TEMP			
13	60	175/60R13	77H	5.00	540/21.3	177/7.0	7.6	400	A	A	70	D	E
		185/60R13	80H	5.50	552/21.7	189/7.4	7.8	400	A	A	70	D	E
14	60	205/60R14	88H	6.00	602/23.7	209/8.2	7.9	400	A	A	71	D	E

Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG					
								TREAD	TRAC	TEMP			
15	55	195/55R15	85V	6.00	595/23.4	201/7.9	7.9	340	AA	A	71	D	E
		205/55R15	88V(W)	6.50	607/23.9	214/8.4	8.0	340	AA	A	71	D	E
	50	195/50R15	82V	6.00	577/22.7	201/7.9	7.9	340	AA	A	71	D	E
		45	195/45R15	78V(W)	6.50	557/21.9	195/7.7	7.8	340	AA	A	71	D
16	55	195/55R16	87V	6.00	620/24.4	201/7.9	7.9	340	AA	A	71	D	E
		205/55ZR16	91W	6.50	632/24.9	214/8.4	7.7	340	AA	A	71	D	E
		205/55ZR16 XL	94W	6.50	632/24.9	214/8.4	7.7	340	AA	A	71	D	E
		225/55R16	95V(W)	7.00	654/25.7	233/9.2	7.9	340	AA	A	71	D	E
	50	205/50R16	87V(W)	6.50	612/24.1	214/8.4	7.8	340	AA	A	71	D	E
		225/50R16	92V	7.00	632/24.8	233/9.2	7.9	340	AA	A	71	D	E
		225/50ZR16	92W	7.00	632/24.9	233/9.2	7.9	340	AA	A	71	D	E
	45	195/45R16	80V(W)	6.50	582/22.9	195/7.7	7.8	340	AA	A	71	D	E
		195/45R16 XL	84V	6.50	582/22.9	195/7.7	7.8	340	AA	A	71	D	E
		205/45R16	83V(W)	7.00	590/23.2	206/8.1	7.9	340	AA	A	71	D	E
		205/45R16 XL	87W	7.00	590/23.2	206/8.1	7.9	340	AA	A	71	D	E
	17	55	215/55R17	94V(W)	7.00	668/26.3	226/8.9	8.0	340	AA	A	71	D
215/55R17 XL			98W	7.00	668/26.3	226/8.9	8.0	340	AA	A	71	D	E
225/55ZR17 XL			101W	7.00	680/26.8	233/9.2	7.9	340	AA	A	72	D	E
50		205/50R17 XL	93V(W)	6.50	638/25.1	214/8.4	7.8	340	AA	A	71	D	E
		215/50R17 XL	95V(W)	7.00	648/25.5	226/8.9	7.9	340	AA	A	71	D	E
		225/50ZR17 XL	98W	7.00	658/25.9	233/9.2	7.9	340	AA	A	71	D	E
45		205/45R17 XL	88V(W)	7.00	616/24.3	206/8.1	7.9	340	AA	A	71	D	E
		215/45R17	87V(W)	7.00	626/24.6	213/8.4	7.9	340	AA	A	71	D	E
		215/45R17 XL	91W	7.00	626/24.6	213/8.3	7.9	340	AA	A	71	D	E
		225/45R17 XL	94V(W)	7.50	634/25.0	225/8.9	7.9	340	AA	A	71	D	E
		235/45R17 XL	97W	8.00	644/25.4	236/9.3	7.9	340	AA	A	71	D	E
		245/45R17	95V(W)	8.00	652/25.7	243/9.6	8.2	340	AA	A	71	D	E
40	205/40ZR17 XL	84W	7.50	596/23.5	212/8.3	7.9	340	AA	A	71	D	E	
	215/40R17 XL	87W	7.50	604/23.8	218/8.6	8.0	340	AA	A	71	D	E	
18	40	225/40ZR18 XL	92W	8.00	637/25.1	230/9.1	7.9	340	AA	A	71	D	E
		235/40R18 XL	95W	8.50	645/25.4	241/9.5	7.9	340	AA	A	71	D	E
		245/40ZR18 XL	97W	8.50	653/25.7	248/9.8	8.2	340	AA	A	71	D	E
19	35	235/35ZR19 XL	91W	8.50	647/25.5	241/9.5	8.0	340	AA	A	71	D	E
		235/35ZR19 XL	91Y	8.00	647/25.5	241/9.5	8.0	340	AA	A	71	D	E
	30	265/30ZR19 XL	93W	9.50	643/25.3	271/10.7	8.3	340	AA	A	72	D	E

Passenger

UHP

SUV / Pick-Up  
Light Truck

Commercial

Winter

Special Trailer




Truck /  
Bus

# DP-8100 PERFORMA EVO

- Asymmetrical radial tire for touring
- Wider contact patch provides stability and control under high speed.
- Four main tread grooves effectively exert water evacuation.
- Cross-support grooves with small-paired sipes prevent uneven wear and reduce noise.
- Reinforced 'Rim Guard' offers high rigidity and protection for aluminum wheels.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG				
								TREAD	TRAC	TEMP		
15	45	195/45R15	78V	6.50	557/21.9	198/7.8	7.6					
		195/45R15	78W	6.50	557/21.9	198/7.8	7.6					
16	50	205/50R16	87V	6.50	612/24.1	214/8.4	7.7					
		205/50R16	87W	6.50	612/24.1	214/8.4	7.7					
		225/50R16	92W	7.00	632/24.9	233/9.2	7.9					
	45	225/50R16 XL	96W	7.00	632/24.9	233/9.2	7.9					
		195/45R16	80V	6.50	582/22.9	195/7.7	7.6					
		195/45R16	80W	6.50	582/22.9	195/7.7	7.6					
17	60	205/45R16	83V	7.00	590/23.2	206/8.1	7.7					
		205/45R16	83W	7.00	590/23.2	206/8.1	7.7					
		215/60R17	96H	6.50	690/27.2	221/8.7	8.0					
	55	215/55R17	94V	7.00	668/26.3	226/8.9	7.8					
		215/55R17	94W	7.00	668/26.3	226/8.9	7.8					
		215/55R17 XL	98W	7.00	668/26.3	226/8.9	7.8					
	50	225/55R17 XL	101W	7.00	680/26.8	233/9.2	7.9					
		215/50R17 XL	95V	7.00	648/25.5	226/8.9	7.9					
		215/50R17 XL	95W	7.00	648/25.5	226/8.9	7.9					
		225/50R17 XL	98W	7.00	658/25.9	233/9.2	7.9					
		235/50R17	96W	7.50	668/26.3	245/9.6	8.0	480	AA	A		
		205/45R17 XL	88V	7.00	616/24.3	206/8.1	7.7					
45	205/45R17 XL	88W	7.00	616/24.3	206/8.1	7.7						
	215/45R17	87V	7.00	626/24.7	213/8.4	7.8						
	225/45R17 XL	94V	7.50	634/25.0	225/8.9	7.9				72 C D		
	225/45R17 XL	94W	7.50	634/25.0	225/8.9	7.9	480	AA	A	71 C D		
	235/45ZR17 XL	97W	8.00	644/25.4	236/9.3	8.0	480	AA	A	72 C D		
	245/45R17	99W	8.00	652/25.7	243/9.6	8.1						
40	215/40ZR17 XL	87W	7.50	604/23.8	218/8.6	7.8						

Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG					
								TREAD	TRAC	TEMP			
18	55	255/55R18 XL	109W	8.00	737/29.0	265/10.4	8.2	480	AA	A			
		225/50R18	95H	7.00	683/26.9	233/9.2	7.8						
	50	235/50R18	97H	7.50	693/27.3	245/9.7	7.8						
		235/50ZR18	101W	7.50	693/27.3	245/9.7	7.8	480	AA	A	71	C	D
	45	225/45ZR18 XL	95W	7.50	659/26.0	225/8.9	7.8						
			235/45R18 XL	94W	8.00	669/26.3	236/9.3	8.0	480	AA	A	71	C
		245/45ZR18	96V	8.00	677/26.7	243/9.6	8.2	540	A	A	71	C	D
		245/45ZR18	96W	8.00	677/26.7	243/9.6	8.2	480	AA	A	71	C	D
		245/45ZR18 XL	100W	8.00	677/26.7	243/9.6	8.2	480	AA	A	72	C	D
		215/40ZR18 XL	89W	7.50	629/24.8	218/8.6	7.8						
	40	225/40ZR18	88W	8.00	637/25.1	230/9.1	7.9	480	AA	A	71	C	D
			92W	8.00	637/25.1	230/9.1	7.9	480	AA	A	72	C	D
235/40ZR18 XL		95W	8.50	645/25.4	241/9.5	8.0	480	AA	A	72	C	D	
245/40ZR18 XL		97W	8.50	653/25.7	248/9.8	8.1	480	AA	A	72	C	D	
19	35	235/35ZR19 XL	91W	8.50	647/25.4	241/9.4	8.0	480	AA	A	71	C	D
		245/35ZR19 XL	93W	8.50	655/25.7	248/9.7	8.1	480	AA	A	72	C	D
		245/35ZR19 XL	93Y	8.50	655/25.7	248/9.7	8.1	480	AA	A			
20	35	225/35R20 XL	90W	8.00	666/26.2	230/9.1	7.9	480	AA	A			
		245/35R20 XL	95W	8.50	680/26.8	248/9.7	8.0	480	AA	A			
		255/35ZR20 XL	97W	9.00	686/27.0	260/10.2	8.2	480	AA	A	72	C	D
22	30	235/30R22 XL	90W	8.50	704/27.7	241/9.5	8.0	480	AA	A			



Passenger

UHP

SUV / Pick-Up  
Light Truck

Commercial

Winter

Special Trailer

Truck /  
Bus

# SUV / Pick-Up Light Truck



## DL-6000 ONVOY

- Unique tread design ensures maximum stability in wet conditions.
- Deep tread grooves improve wear resistance and long life.
- Steel belt construction enhances load capacity and safety.
- Distinctive but symmetric patterns on each tread section reduce noise.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Ply Rating	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
15	75	LT235/75R15	8PR(D)	110/107Q	6.50	733/28.9	235/9.3	11.1
	85	LT215/85R16	10PR(E)	115/112Q	6.00	772/30.4	216/8.5	11.3
16	75	LT235/85R16	10PR(E)	120/116Q	6.50	806/31.7	235/9.3	10.7
		LT225/75R16	10PR(E)	115/112Q	6.00	744/29.3	223/8.8	11.1
	75	LT245/75R16	10PR(E)	120/116Q	7.00	774/30.5	248/9.8	10.9
		LT265/75R16	10PR(E)	123/120Q	7.50	804/31.7	267/10.5	12.1
17	80	LT235/80R17	10PR(E)	120/117Q	6.50	808/31.8	235/9.3	11.1
	75	LT245/75R17	10PR(E)	121/118Q	7.00	800/31.5	248/9.8	10.9
		LT245/70R17	10PR(E)	119/116Q	7.00	776/30.6	248/9.8	10.9
	70	LT265/70R17	10PR(E)	121/118Q	8.00	804/31.7	272/10.7	12
		LT275/70R17	8PR(D)	120/117Q	8.00	818/32.2	279/11.0	12.3





## DL-6100 FRONTIER A/S

- S-shaped ribs on central tread enlarge contact surface and enhance handling performance.
- Weave-design edge sipes and shoulder grooves increase water and mud evacuation.
- Stepped shoulder blocks for better traction, stability and water evacuation
- Multi-staged sipping reduces noise.
- Aggressive shoulder design for excellent off-road ability on trails



Diameter (inch)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG		
							TREAD	TRAC	TEMP
15	30x9.50R15LT	104S	7.50	750/29.5	240/9.4	11.2			
	31x10.50R15LT	109S	8.50	775/30.5	268/10.6	12.7			
16	265/70R16	112T	8.00	778/30.6	272/10.7	10.7	500	A	A
	275/70R16	114T	8.00	792/31.2	279/11.0	11.0	500	A	A



## DL-6110 FRONTIER H/T II

- S-shaped ribs on central tread enlarge contact surface and enhance handling performance.
- Intensive layout with curved and shoulder grooves increase water and mud evacuation.
- Distinctive but symmetric patterns on each tread section reduce noise.
- Continuous shoulder blocks enhance cornering stability.



Diameter (inch)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
17	265/70R17	115T	8.00	804/31.6	272/10.7	10.7

# DL-6120 FRONTIER A/T

- Intensive pattern design with striped, curved and shoulder grooves increase water and mud evacuation.
- Distinctive but symmetric patterns on each tread section reduce noise.
- Enlarged tread blocks increase contact surface and enhance handling performance.
- Excellent off-road traction



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG			
								TREAD	TRAC	TEMP	
17	70	245/70R17	110T	7.00	776/30.6	248/9.8	10.7	500	AA	A	
		255/70R17	112T	7.50	790/31.1	260/10.2	10.7	500	AA	A	
		265/70R17	115T	8.00	802/31.6	273/10.7	10.7	500	AA	A	
18	65	245/65R17	107H	7.00	750/29.5	248/9.8	10.7	500	AA	A	
		255/70R18	113T	7.50	815/32.1	260/10.2	10.7	500	AA	A	
		265/65R18	114T	8.00	801/31.5	272/10.7	10.7	500	AA	A	
18	65	275/65R18	116H	8.00	815/32.1	279/11.0	10.7	500	AA	A	
		265/60R18	110T	8.00	775/30.5	272/10.7	10.7	500	AA	A	
		20	55	275/55R20	111H	8.50	810/31.9	284/11.2	10.7	500	AA
15	75	LT215/75R15	100/97Q	6.00	703/27.7	210/8.3	10				
16	85	LT235/85R16	120/116S	6.50	806/31.7	235/9.3	12.7				
		LT245/75R16	120/116S	7.00	774/30.5	248/9.8	12.7				
		75	LT265/75R16	123/120S	7.50	804/31.7	267/10.5	12.7			
		8.00	LT285/75R16	126/123S	8.00	834/32.8	286/11.3	12.7			
17	75	LT245/75R17	121/118S	7.00	800/31.5	248/9.8	12.7				
		70	LT265/70R17	121/118S	8.00	804/31.7	272/10.7	12.7			
		8.50	LT285/70R17	121/118S	8.50	832/32.8	292/11.5	12.7			
18	65	LT275/65R18	123/120S	8.00	815/32.1	279/11.0	12.7				
		8.50	LT285/65R18	125/122S	8.50	827/32.6	292/11.5	12.7			
20	65	LT275/65R20	126/123S	8.00	866/34.1	279/11.0	12.7				



# DI-2042 POWER GRIP M/T & M/T-S



Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	30x10.00R14	81Q	8 PR	8.0AT	759/29.9	251/9.9	14.2





# DL-6210 FRONTIER H/T

- Continuous tread design enlarges contact surface and enhances handling performance.
- Unique pattern on tire shoulder strengthens rigidity and traction.
- Distinctive but symmetric patterns on each tread section reduce noise.
- S-shaped edge profile with large grooves improve water and mud evacuation.
- Ladder blocks reinforce traction on rugged or mud roads, and enhance water and mud evacuation.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	UTQG		
								TREAD	TRAC	TEMP
16	70	235/70R16	104T	7.00	736/29.0	240/9.5	9.2	600	A	A
		265/70R16	111T	8.00	778/30.6	272/10.7	9.5	600	A	A
	60	235/60R16	100H(T)	7.00	688/27.1	240/9.4	9.2	600	A	A
17	70	245/70R17	110T	7.00	776/30.6	248/9.8	9.5	600	A	A
		255/70R17	112T	7.50	790/31.1	260/10.2	9.5	600	A	A
		265/70R17	115T	8.00	804/31.7	272/10.7	9.5	600	A	A
	65	235/65R17	104H	7.00	738/29.1	240/9.4	9.2	600	A	A
		235/65R17 XL	108V	7.00	738/29.1	240/9.4	9.2	600	A	A
18	70	245/65R17	107H	7.00	750/29.5	248/9.8	9.5	600	A	A
		255/70R18	113T	7.50	815/32.1	260/10.2	9.5	600	A	A
		265/70R18	114S	8.00	829/32.6	272/10.7	9.5	600	A	A
	65	255/65R18	109T	7.00	802/31.6	248/9.8	9.5	600	A	A
		265/65R18	114T	8.00	801/31.5	272/10.7	9.5	600	A	A
		275/65R18	116H	8.00	815/32.1	279/11.0	9.5	600	A	A
60	265/60R18	110T	8.00	775/30.5	272/10.7	9.5	600	A	A	
20	60	245/60R20	107H	7.00	802/31.6	248/9.8	9.5	600	A	A
		275/60R20	114H	8.00	838/33.0	279/11.0	9.5	600	A	A
	55	275/55R20	111H	8.50	810/31.9	284/11.2	9.5	600	A	A
22	50	265/50R20	107T	8.50	774/30.5	277/10.9	9.5	600	A	A
		45	285/45R22 XL	110H	9.50	815/32.1	285/11.2	9.5	600	A
16	85	LT215/85R16	115/112S 10PR	6.00	774/30.5	223/8.8	11.0			
		LT235/85R16	120/116S 10PR	6.50	806/31.7	235/9.3	11.0			
	75	LT225/75R16	115/112S 10PR	6.00	774/30.5	223/8.8	11.0			
		LT245/75R16	120/116S 10PR	7.00	774/30.5	248/9.8	11.0			
17	80	LT265/75R16	123/120S 10PR	7.50	804/31.7	267/10.5	11.0			
		LT235/80R17	120/117S 10PR	6.50	808/31.8	235/9.3	11.0			
	75	LT245/75R17	121/118S 10PR	7.00	800/31.5	248/9.8	11.0			
		LT245/70R17	119/116S 10PR	7.00	776/30.6	248/9.8	11.0			
		70	LT265/70R17	121/118S 10PR	8.00	804/31.7	272/10.7	11.0		
18	70	LT285/70R17	121/118S 10PR	8.50	832/32.8	292/11.5	11.0			
		70	LT275/70R18	125/122S 10PR	8.00	843/33.2	279/11.0	11.0		
18	65	LT275/65R18	123/120S 10PR	8.00	815/32.1	279/11.0	11.0			

# DL-6200 FRONTIER SPT

- Directional radial tire with high performance
- Wider contact patch enhances stability and control.
- Rounded grooves improve water evacuation and aid in even tread wear.
- Large shoulder blocks strengthen handling and stability.
- Reinforced 'Rim Guard' on sidewall increases rigidity and protection.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
18	55	235/55R18	100V	7.50	715/28.1	245/9.6	8.2
		235/55R18 XL	104V	7.50	715/28.1	245/9.6	8.2
	50	235/50R18	97V	7.50	693/27.3	245/9.6	8.2
20	50	265/50R20	107V	8.50	774/30.5	277/10.9	8.3
	45	255/45R20 XL	105V	8.50	738/29.1	255/10.0	8.2



# DL-6220 FRONTIER EVO

- Larger contact patch provides stability and control under high speed.
- Pattern design enhances braking performance and avoids uneven wear.
- Optimized layout with unequally-pitched tread reduces noise effectively.
- Wider main grooves on central tread contribute to excellent driving performance on wet surfaces.
- Angled grooves moderate wind resonance for a quiet driving experience.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
15	70	205/70R15	96H	6.00	669/26.3	209/8.2	7.7
16	70	215/70R16	100H	6.50	708/27.9	221/8.7	7.8
	60	235/60R16	100H	7.00	688/27.1	240/9.4	8.0
17	65	225/65R17	102H	6.50	724/28.5	228/9.0	7.9
18	60	225/60R18	100V	6.50	727/28.6	228/9.0	7.9
		235/60R18 XL	107V	7.00	739/29.1	240/9.5	8.0
	55	225/55R18	98V	7.00	705/27.8	233/9.2	7.8
	50	235/50R18 XL	101V	7.50	693/27.3	245/9.5	7.8





## DL-6500

- Continuous pattern design enlarges contact surface and enhances handling performance.
- Shoulder grooves increase rigidity and traction.
- Jagged ribs and netted grooves on tread improve water and mud evacuation.
- Ladder blocks improve traction on rugged or mud roads.
- Newly-developed compound for excellent wearing resistance even under extreme weather conditions



LT



control



comfort

wear  
lifewet  
performancefuel  
efficiency

Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
16	7.50R16LT	114/112R	8PR	6.00	805/31.7	211/8.3	11
	7.50R16LT	119/117R	10PR	6.00	805/31.7	211/8.3	11

TAIWAN  
EXCELLENCE  
2019



## DL-6600

- Large tread blocks improve grip on mixed terrain while deep voids eject mud, gravel, and debris
- Shoulder blocks enable a wider footprint, protect the tire from sharp rocks, and improve traction at low pressures and through tight turns
- Raised bars between tread blocks eject stones and prevent flats
- 3-ply rated casing fights sidewall punctures and aids in load capacity
- Variable pitched tread provides a quieter drive on the pavement while the wide flat profile aids in durability



MUD TERRAIN



4X4



control



comfort

wear  
lifewet  
performancefuel  
efficiency

Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
18	35x12.50R18LT	128Q	12PR	10.00	877/34.52	318/12.50	17
	33X12.50R20LT	119Q	12PR	10.00	826/32.50	318/12.50	17
	35X12.50R20LT	125Q	12PR	10.00	877/34.50	318/12.50	17
20	37x12.50R20LT	128Q	12PR	10.00	928/36.52	318/12.50	17
	37x13.50R20LT	128Q	12PR	11.00	928/36.52	345/13.58	17
22	33X12.50R22LT	114Q	12PR	9.50	826/32.50	313/12.32	17
	35X12.50R22LT	121Q	12PR	9.50	877/34.50	313/12.32	17

# Commercial



## DC-7000

- S-shaped grooves provide cornering control while delivering outstanding wet grip.
- Three types of staggered tread pitches reduce noise.
- Lightweight construction with reduced unsprung weight for swift steering response



Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)			
13	155R13C	91/89N	8PR	4.50	578/22.8	157/6.5	8.5	71	C	E
	165R13C	94/92N	8PR	4.50	596/23.5	167/6.6	8.3	71	C	E
	LT5.50R13	97/95P	12PR	3.50	626/24.6	157/6.8	8.8			
14	185R14C	102/100N	8PR	5.50	650/25.6	188/7.4	8.2	71	C	E



## DC-7010

- Three wide straight grooves enhance water expulsion.
- Distinctive but symmetric patterns on each tread section reduce noise.
- Horizontal grooves and sipes provide gripping power in wet or dry conditions.
- Enlarged tread blocks increase contact surface and reinforce handling performance.



Commercial



Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
13	155R13C	91/89N	8PR	4.50	578/22.8	157/6.2	8.5
	165R13C	94/92R	8PR	4.50	596/23.5	167/6.6	8.6
14	185R14C	102/100P	8PR	5.50	650/25.5	188/7.4	8.8
16	195/75R16C	110/108N		5.50	698/27.5	196/7.7	9.5



## DC-7100

- Three wide and deep vertical grooves expel water efficiently and secure driving safety.
- Squarish shoulder blocks effectively increase cornering rigidity.
- Solid steel belts greatly enhance the overall performance.
- Continuous tread grooves for excellent wear resistance and anti-slip performance



Commercial



Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
13	165/70R13C	88/86S		5.00	562/22.1	170/6.7	7.8
14	175/75R14C	95/93S	6PR	5.00	602/23.7	177/7.0	9.5

# DC-7200

- Three jagged grooves and weave-design sipes on tread increase gripping power and contribute to high performance on wet or dry surfaces.
- Angular tread pattern enhances water expulsion for improved wet traction.
- Solid steel belts greatly increase loading capacity.
- Distinctive but symmetric patterns on each tread section reduce noise.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	Max Speed	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)			
13	50	195/50R13C	104/101N	140	6.00	526/20.7	201/7.9	9.4	72	C	E
16	75	195/75R16C	110/108N	140	5.50	698/27.5	196/7.7	8.0	72	C	E





# DC-7210

- Three wide and deep vertical grooves expel water efficiently.
- Intensive sipes on tread for ideal contact and quiet drive on the road
- Horizontal grooves and surrounding sipes provide powerful grip
- Shoulder knobs offer great wear resistance for longer service life
- High-tensile steel belts and large shoulder knobs contribute to excellent loading capacity.



Commercial



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	AB	UHP	SUV / Pick-Up
14		195R14C	106/104R	5.50	666/26.3	198/7.8	10	72	C	D
	75	185/75R14C	102/100R	5.00	634/25.0	184/7.2	10	72	C	D
	70	165/70R14C	89/87R	5.00	588/23.1	170/6.7	8.7	72	C	D
	65	175/65R14C	90/88T	5.00	584/23.0	177/7.0	9.7	72	C	D
15		195R15C	106/104R	5.50	690/27.2	198/7.8	10	72	C	D
	70	195/70R15C	104/102R	6.00	655/25.8	201/7.9	10.3	72	C	D
		205/70R15C	106/104S	6.00	669/26.3	209/8.2	10.5	72	C	D
		215/70R15C	109/107R	6.50	683/26.8	221/8.7	10.7	72	C	D
225/70R15C		112/110R	6.50	697/27.4	228/9.0	11.1	72	C	D	
16	75	175/75R16C	101/99R	5.00	668/26.3	177/7.0	9.7	72	C	D
		185/75R16C	104/102R	5.00	684/27.0	184/7.2	10	72	C	D
		215/75R16C	113/111R	6.00	728/28.7	216/8.5	11.1	72	C	D
		225/75R16C	118/116R	6.00	744/29.3	223/8.8	11.1	72	C	D
	65	195/65R16C	104/102R	6.00	660/26.0	201/7.9	10.3	72	C	D
		205/65R16C	107/105T	6.00	672/26.5	209/8.2	10.5	72	C	D
		215/65R16C	109/107R	6.50	686/27.0	221/8.7	10.7	72	C	D
		225/65R16C	112/110R	6.50	698/27.5	228/9.0	10	72	C	D

Passenger

UHP

SUV / Pick-Up  
Light Truck

Commercial

Winter

Special Trailer

Truck /  
Bus

# DC-7300

- Four wide straight grooves improve water expulsion and handling performance in wet or dry road conditions.
- Distinctive but symmetric patterns on each tread section reduce noise.
- Solid steel belt structure enhances load capacity and safety.
- Special rubber compound for increased casing strength and wear resistance



Commercial



Diameter (inch)	Tire Size	Load Index & Speed Rating	Max Speed	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	DB	B	E
16	205/75R16C	113/111N	140	5.50	714/28.1	203/8.0	11.6	72	B	E



# DC-7310


- Four wide straight grooves improve water expulsion and handling performance in wet or dry road conditions.
- Distinctive but symmetric patterns on each tread section reduce noise.
- Solid steel belt structure enhances load capacity and safety.
- Special rubber compound for increased casing strength and wear resistance



Commercial



Diameter (inch)	Tire Size	Load Index & Speed Rating	Ply Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
13	6.00R13LT	93/89N	8PR	4.50	655/25.8	170/6.7	9.4
14	6.00R14LT	100/96N	10PR	4.50	680/26.8	170/6.7	9.4
15	7.00R15LT	114/112L	12PR	5.50	751/29.6	194/7.6	10.0
16	6.50R16LT	107/102L	10PR	5.50	750/29.5	185/7.3	8.9
	7.00R16LT	115/110L	12PR	5.50	776/30.6	194/7.6	10.0
	7.00R16LT	117/116L	12PR	5.50	776/30.6	194/7.6	10.0

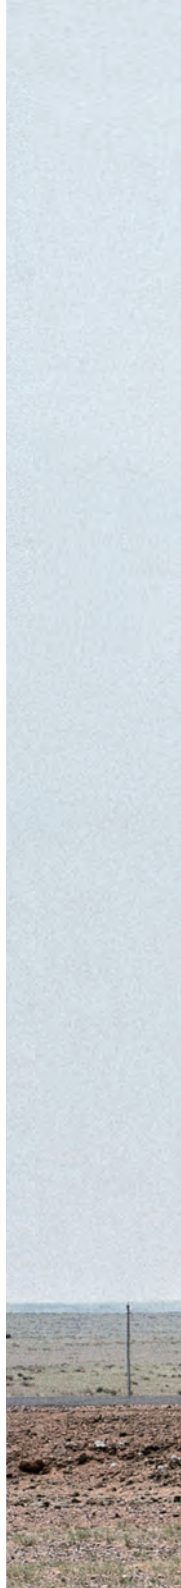



Passenger

UHP

SUV / Pick-Up  
Light Truck

Commercial

Winter

Special Trailer

Truck /  
Bus

# Winter



## DW-9000 SNOW FOX

- Compound designed for colder temperatures
- Four wide and deep tread grooves excel in efficient snow and water evacuation.
- Distinctive but symmetric pattern ensures vehicle stability and control under all conditions.
- Quieter running and high mileage profile



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)				
14	65	175/65R14	82T	5.00	584/23.0	177/7.0	8.7	71	D	E	
		185/65R14	86H(T)	5.50	596/23.5	189/7.4	8.7	71	D	E	
	60	185/60R14	82T	5.50	578/22.8	189/7.4	8.7	71	D	E	
15	75	235/75R15	105T	6.50	733/28.9	235/9.3	8.7				
	70	205/70R15	96T	6.00	669/26.3	209/8.2	8.7				
		215/70R15	98T	6.50	683/26.9	221/8.7	8.7				
	65	165/65R15	81T	5.00	595/23.4	170/6.7	8.7	71	D	E	
		175/65R15 XL	88T	5.00	609/24.0	177/7.0	8.7	71	D	E	
		185/65R15	88T	5.50	621/24.4	189/7.4	8.7	71	D	E	
		185/65R15 XL	92T	5.50	621/24.4	189/7.4	8.7	71	D	E	
		195/65R15	91H	6.00	635/25.0	201/7.9	9.0	72	D	E	
		195/65R15 XL	95H	6.00	635/25.0	201/7.9	9.0	72	D	E	
		205/65R15 XL	99H	6.00	647/25.5	209/8.2	8.7	72	D	E	
185/60R15 XL		88T	5.50	603/23.7	189/7.4	8.7	71	D	E		
60	195/60R15	88H	6.00	615/24.2	201/7.9	8.7	72	D	E		
	205/60R15 XL	95H	6.00	627/24.7	209/8.2	8.7	72	D	E		
16	60	225/60R16	98H	6.50	676/26.6	228/9.0	8.7				





## DW-9100

- Compound designed for colder temperatures
- Distinctive but symmetric pattern ensures vehicle stability and control under all conditions.
- Quieter running and high mileage profile



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)			
15	55	185/55R15 XL	86H	6.00	585/23.0	194/7.6	8.5	71	D	E
		195/55R15	85H	6.00	595/23.4	201/7.9	8.5	72	D	E
	50	195/50R15	82H	6.00	577/22.7	201/7.9	8.5	72	D	E
16	60	205/60R16 XL	96H	6.00	652/25.7	209/8.2	8.5	72	D	E
		195/55R16	87H	6.00	620/24.4	201/7.9	8.5	72	D	E
	55	205/55R16	91H	6.50	632/24.9	214/8.4	8.8	72	D	E
		205/55R16 XL	94V	6.50	632/24.9	214/8.4	8.8	72	D	E
		215/55R16 XL	97H(V)	7.00	642/25.3	226/8.9	8.5	72	D	E
		225/55R16 XL	99H(V)	7.00	654/25.7	233/9.2	8.5	72	D	E
50	205/50R16	87H(V)	6.50	612/24.1	214/8.4	8.5	72	D	E	
17	45	225/45R17 XL	94V	7.50	634/25.0	225/8.9	8.5	72	D	E



## DW-9200 VOYAGER A/S

- Advanced Silica compound remains flexible and great handling in cold temperatures.
- Main center grooves contribute to snow, water and mud evacuation.
- Horizontal voids and 3D sipes enhance traction on snow and ice.
- Distinctive but symmetric profile reduces noise.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
16	55	205/55R16	91H	6.50	632/24.9	214/8.4	8.5
		205/55R16 XL	94V	6.50	632/24.9	214/8.4	8.5

# DW-9300

- Advanced Silica compound keeps flexible and great performance in cold temperatures.
- Unique and symmetric pattern design improves snow, water and mud evacuation.
- Wavy sipes and small grooves contribute to outstanding traction on snow.
- Auxiliary saw-toothed grooves add in braking performance.



PCR



Diameter (inch)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)	72	D	E
15	195/65R15 XL	95R	6.00	635/25.0	201/7.9	9.2			



# DW-9400

- Advanced Silica compound keeps flexible and great performance in cold temperatures.
- Main and auxiliary radial grooves designed to expel water and channel snow
- Diamond knobs for enhanced traction on ice
- 3D saw-toothed sipes improve handling performance on ice and snow.
- Winter tires pinned for studs



PCR



Diameter (inch)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	175/65R14 XL	86T	5.00	584/23.0	177/7.0	10





## DW-9500

- Advanced winter tire compound remains flexible and strong grip in cold temperatures.
- 3D pattern design provides great handling and traction on snow and ice.
- Multi-directional fine grooves for snow and water can be cut and dispersed easily
- Large tread blocks in the outer tread area enhance handling performance.
- Biting edges and small storage area on tire shoulder channel snow and expel water for remarkable traction on ice.



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
15	65	195/65R15	91Q	6.00	635/25.0	201/7.9	9.2
		215/65R15	96Q	6.50	661/26.0	221/8.7	9.2
16	65	215/65R16	98Q	6.50	686/27.0	221/8.7	9.2



## DW-9700 SNOW TranSport

- Silica compound designed for colder temperatures
- Wide and deep vertical grooves expel snow and water efficiently.
- Horizontal voids provide excellent traction on both snow and ice.
- High-tensile steel belts and large shoulder knobs contribute to excellent loading capacity.
- Small sipes on tread increase friction and gripping power on snowy road surface.



Diameter (inch)	Tire Size	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
14	195R14C	106/104Q	5.50	666/26.3	198/7.8	11

# Special Trailer

## DS-2100

- Four wide main grooves ensure precise handling.
- Enlarged shoulder tread width reduces side slip.
- Distinctive but symmetric patterns on each tread section reduce noise.



TRAILER



Diameter (inch)	Aspect Ratio(%)	Tire Size	Load (Kg/Lbs)	Ply Rating	Load Index & Speed Rating	RIM (inch)	Outside Diameter (mm/inch)	Section Width (mm/inch)	Tread Depth (mm)
13	80	ST175/80R13	615/1360	C	91N	5.00	610/24.0	177/7.0	7.6
		ST185/80R13	670/1480	C	94N	5.00	626/24.7	184/7.2	7.7
14	75	ST205/75R14	800/1760	C	100N	5.50	664/26.1	203/8.0	7.8
		ST215/75R14	850/1870	C	102N	6.00	678/26.7	216/8.5	7.9
15	75	ST205/75R15	825/1820	C	101N	5.50	689/27.1	203/8.0	7.8
		ST205/75R15	975/2150	D	107N	5.50	689/27.1	203/8.0	7.8
		ST225/75R15	1190/2620	D	113N	6.00	719/28.3	223/8.8	8.0
		ST225/75R15	1285/2830	E	117N	6.00	719/28.3	223/8.8	8.0
16	85	ST235/85R16	1650/3640	E	125N	6.50	806/31.7	235/9.3	8.3
		ST235/85R16	1800/3960	F	128N	6.50	806/31.7	235/9.3	8.3
	80	ST235/80R16	1600/3520	E	123N	6.50	782/30.8	235/9.3	8.0

# Truck / Bus



## DT-1000



TRUCK



BUS

- Advanced winter tire compound remains flexible and strong grip in cold temperatures.
- 3D pattern design provides great handling and traction on snow and ice.
- Multi-directional fine grooves for snow and water can be cut and dispersed easily
- Large tread blocks in the outer tread area enhance handling performance.
- Biting edges and small storage area on tire shoulder channel snow and expel water for remarkable traction on ice.

Diameter (inch)	Tire Size	Ply Rating	Outside Diameter (mm/inch)	Section Width (mm/inch)	Load		INFL.		RIM (inch)
					Kg	Lbs	Kpa	P.S.I	
20	9.00-20	14	1027	264	2415 / 2300	5325 / 5070	675	96	7.0
	10.00-20	14	1071	287	2700 / 2425	5950 / 5345	675	96	7.5
	11.00-20	14	1094	299	2840 / 2670	6260 / 5885	675	96	8.0
	12.00-20	18	1142	316	3250 / 3095	7160 / 6820	700	100	8.5



## DT-1050



TRUCK



BUS

- Classic pattern provides great handling even on uneven surfaces.
- Special rubber compound for better wear and tear resistance
- Reinforced construction provides higher loading capacity.
- Unique shoulder grooves contribute to powerful steering and traction.
- Wider surface contact offers excellent stability and comfort.

Diameter (inch)	Tire Size	Ply Rating	Outside Diameter (mm/inch)	Section Width (mm/inch)	Load		INFL.		RIM (inch)
					Kg	Lbs	Kpa	P.S.I	
20	9.00-20	14	1026	264	2415 / 2300	5325 / 5070	675	96	7.0
	10.00-20	14	1071	285	2700 / 2425	5950 / 5345	675	96	7.5
	11.00-20	14	1091	295	2840 / 2670	6260 / 5885	675	96	8.0
	12.00-20	18	1140	316	3250 / 3095	7160 / 6820	700	100	8.5

## HWA FONG RUBBER GROUP

### Hwa Fong Rubber Ind. Co., Ltd. - Headquarter

No.300, Sec. 2, Chung-Shan Rd., Ta-Tsun Township, Changhua County 515002, Taiwan  
TEL: 886-4-8520121  
FAX: 886-4-8525833  
E-Mail: info@duro.com.tw

### Hwa Fong Rubber (USA) Inc.

14290 Lochridge Blvd, Covington, Georgia 30014, U.S.A.  
TEL: 770-7882060  
FAX: 770-7882099  
E-Mail: info@durotire.com

### Hwa Fong Rubber (Thailand) Public Co., Ltd.

317 Moo 4, Soi 6C, Bangpoo Industrial Estate, Samutprakarn 10280, Thailand  
TEL: 66-2-7096580  
FAX: 66-2-324-0481  
E-Mail: reception@duro.co.th

### Hwa Fong Rubber (China) Co., Ltd.

1 Xinye Road, Changshu Economic Development Zone, Riverside Industrial Park, Jiangsu, China  
TEL: 86-512-52296380  
FAX: 86-512-52657007  
E-Mail: hfc.fina@durotire.com.cn



HWA FONG RUBBER

HWA FONG RUBBER Ind. Co.,Ltd.

Authorized Distributor

WWW.DURO.COM.TW